

Manual

fasttel

Luxury Door Entry Systems

FT3000LIC smartphone link for android



Fasttel reserves the right to change the content without prior notice..


Fasttel België, Klipsenstraat 18A, 9160 Lokeren. Tel +32 (0)9 244 65 20 info@fasttel.be
Fasttel Nederland, Heiligenboom 3, 5066 CB Moergestel. Tel +31 (0)13 513 65 14 info@fasttel.nl

Below you will find the settings that are necessary on an android mobile phone.


Depending on the type of device (Samsung/Xiaomi/Motorola etc), these settings can be reached elsewhere.

However, these settings must always be set correctly.


If you do not immediately find this in your device, reinstalling the App is the simplest solution, because on the first start up, all settings are reviewed by the App by means of answering the questionnaire.

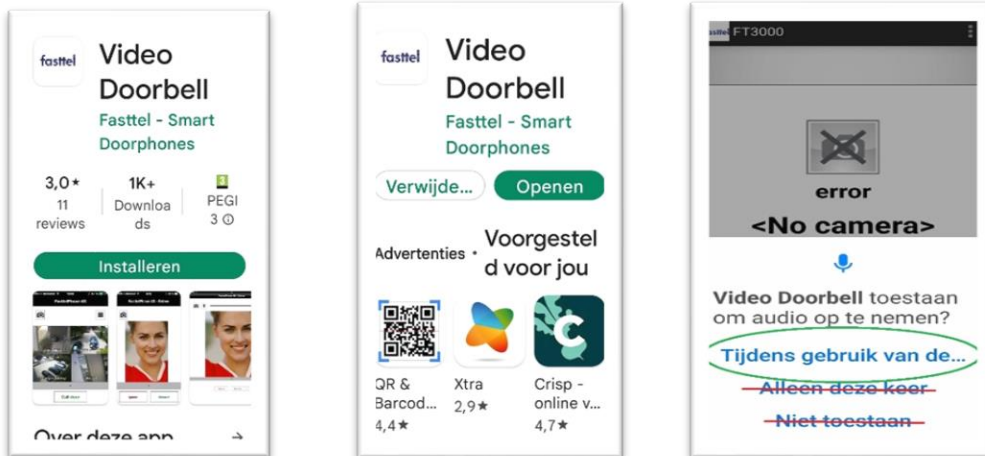


For further adjustments, go to your phone's settings. Press the search function and search for Apps.

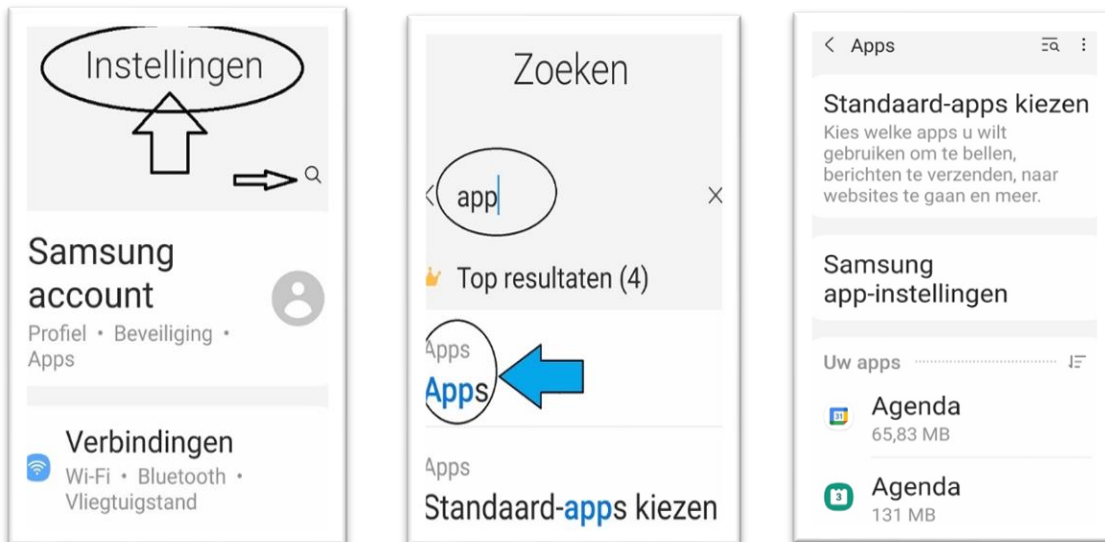


Locate the Video Doorbell App and select it where a sharing options will appear.

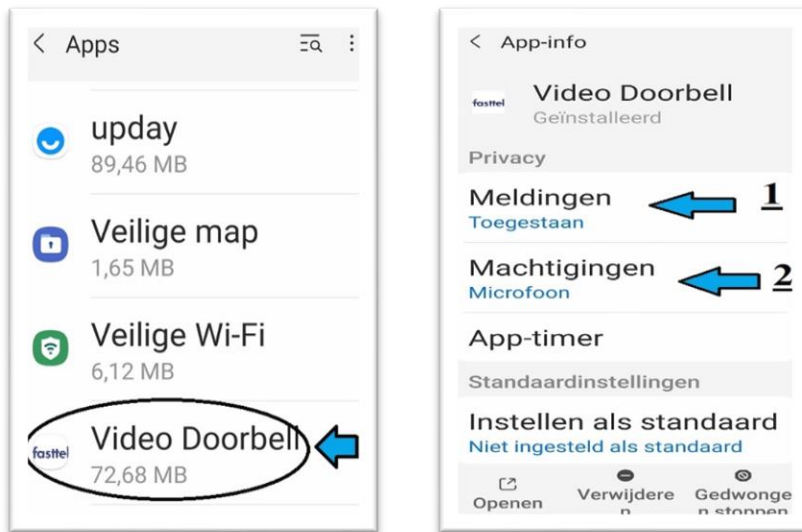

With the notifications option you give the App permission to allow notifications (1) in general as a notification at the top of your screen. With the Permissions option (2) you give permission to use the microphone (conversation) and storage (photos from the camera that can be saved become)

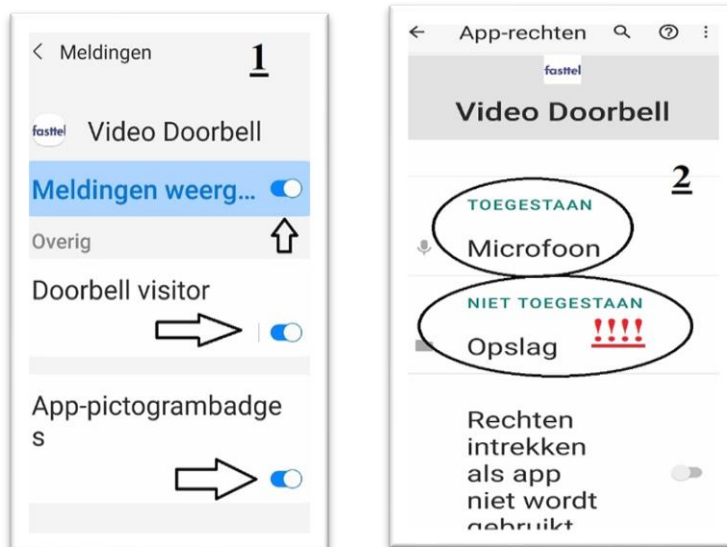


Please also check the Mobile data options / Show top option and any other option that they are allowed. This is necessary if someone is pressed your bell that you get the necessary notifications your phone.

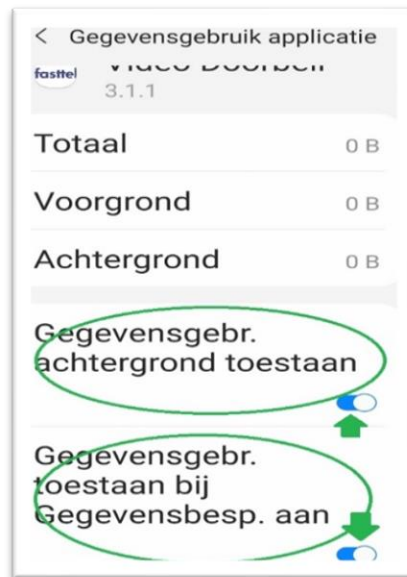


on
on
on

Once this information has been checked, you can close the settings and start the App.


In the first phase, the message "error <No Camera> " come

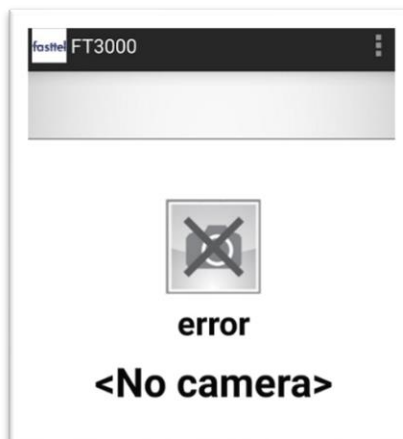


Select top right the 3 dots and choose Settings



Change the name of your device to a recognizable name (Your name or device name) This makes it easier to change / approve or remove devices afterwards with updates to your phone or purchase a new device)

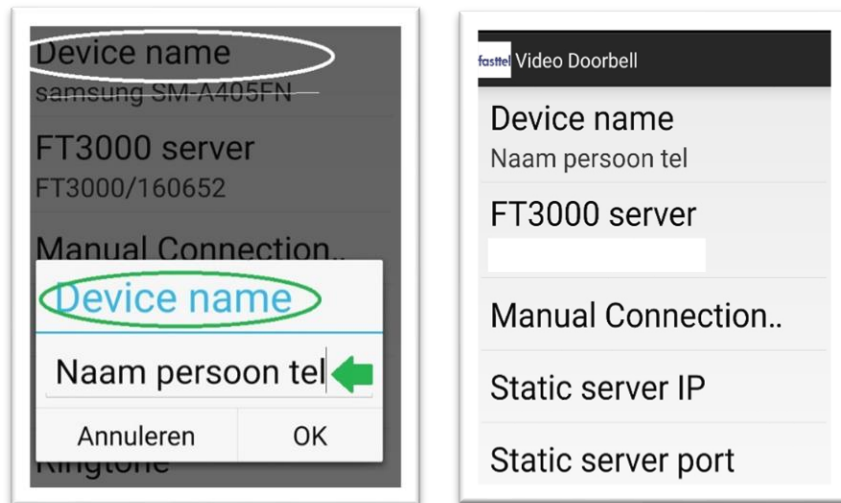

Set the “manual connection code” that you received from your installer and press ok.

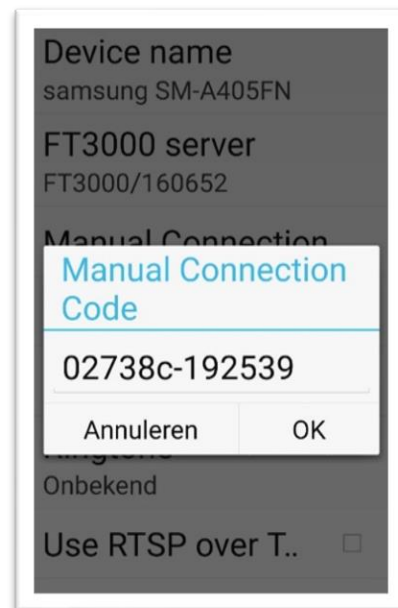

At the FT3000 server a number will now appear: (FT3000/160xxx) This corresponds to the SIP server that you have purchased. **If help is needed in the future, this number is important !!!!!**

Close the App and restart it. If the Central (FT3000) is configured correctly, you should now have a picture. If this is not the case, you must warn the installer:

- 1 approve your device on the control panel
- 2 assign the doorbell to your user +
- 3 properly set up the camera connection on the server.