

# Manual

# fasttel

## Door Entry Systems

# FT600(K)

## Doorphone Entry Outdoor Unit

(Use only for expansion FT600V(K))



Fasttel reserves the right to change the content without prior notice.

Fasttel België, Klipsenstraat 18A, 9160 Lokeren. Tel +32 (0)9 244 65 20 [info@fasttel.be](mailto:info@fasttel.be)  
Fasttel Nederland, Heiligenboom 3, 5066 CB Moergestel. Tel +31 (0)13 513 65 14 [info@fasttel.nl](mailto:info@fasttel.nl)

You have just purchased an additional entrance station for your Doorphone Entry Kit.

This can be for 2 reasons:

- It serves as a replacement for an existing defective outdoor station
- It serves as an extension of an existing installation of a Doorphone Entry Kit

Then you have the right article, because this article can only be used for the above cases.

This will also only work if you have provided us with the code of the current installation, so that we have been able to link the post to your system via software.

This code starts with: FT600VK followed by (K) and/or 3 digits

The outpost is also plug and play.

## 1) Packing

When you open the package you will find the following parts:

- FT600K Outdoor station with keypad.
- FT600BUS surface mount housing
- Bag with 4 x Torx + waterproof seal for the Lan + connectors
- QR codes for the Manual

The FT600K Outpost is equipped with a flush-mounted or surface-mounted housing.  
Make sure that the housing is mounted level.

## 2) The Installation

The FT600K Doorphone Entry Entry Station.

- First, mount the housing in the right place on/in the wall.


In connection with the camera present, we advise you to keep to the outdoor station measured from the ground to the bottom of the Doorphone Entry 1.40 metres.

- Make sure that the UTP cable for the network without connector is in place and also a cable (minimum 2 cores hard core) for your electric lock.

- First take the waterproof housing out of the packaging and slide the cover over the UTP cable and the cable for the lock.

- Mount an RJ45 connector on the UTP cable and insert it into the Doorphone Entry in the connection provided.

- Connect the other cable to relay A or relay B to NO+COM




- Close the cover and use the correct cable grommet to seal the Doorphone Entry watertight. Assemble the whole with the 6 supplied bolts.

- Now place the external unit in the housing and fix it to the housing with the 4 supplied Torx bolts.

3) Access control via Keypad Your Doorphone Entry has a Keypad which can be used for access codes.

Surf to the IP address of your Doorphone. If you do not know how to do this, enter the following combination on the doorphone \*3258\* and the speaker will tell you the correct IP address.

Open the web browser of the IP address and log in with user / user. In the left column choose Intercom and then Private key

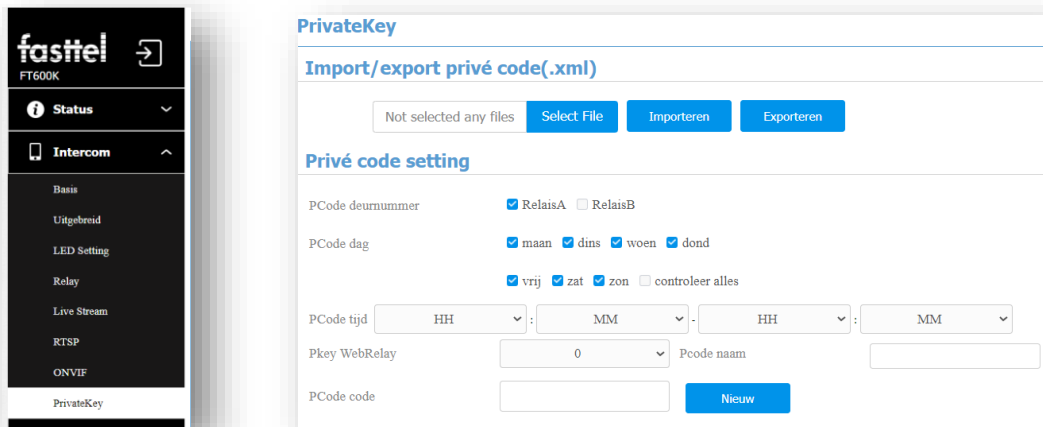

Enter a new code at PCode and choose new.

The code has been added You then enter #code# at the outpost itself to open the gate.

If you have any questions, call Fasttel Smart Doorphones

at the number 0902 00060 for end users

on the number 09/2446520 (choice 2) for installers

Have your outdoor station serial number ready.

You can find that on the back of the outpost or on the back of the monitor and it starts with FT600.